



# Peer-to-Peer Networks

**Fast Download  
11th Week**

Albert-Ludwigs-Universität Freiburg  
Department of Computer Science  
Computer Networks and Telematics  
Christian Schindelhauer  
Summer 2008

Peer to Peer Networks

# Fast Download

# IP Multicast

## ► Motivation



- Transmission of a data stream to many receivers

## ► Unicast

- For each stream message have to be sent separately
- Bottleneck at sender

## ► Multicast

- Stream multiplies messages
- No bottleneck

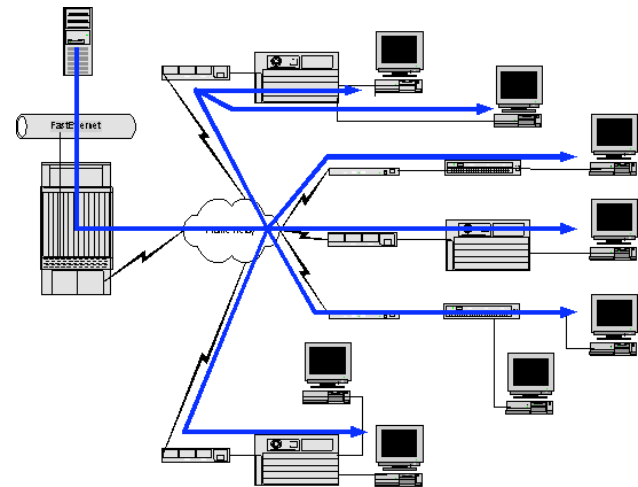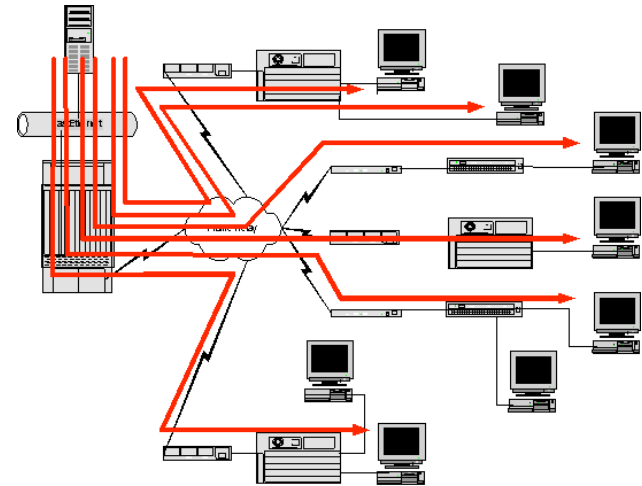

Peter J. Welcher

[www.netcraftsmen.net/.../papers/multicast01.html](http://www.netcraftsmen.net/.../papers/multicast01.html)

# Working Principle

## ▶ IPv4 Multicast Addresses

- class D
  - outside of CIDR (Classless Interdomain Routing)
- 224.0.0.0 - 239.255.255.255

## ▶ Hosts register via IGMP at this address

- IGMP = Internet Group Management Protocol
- After registration the multicast tree is updated

## ▶ Source sends to multicast address

- Routers duplicate messages
- and distribute them into sub-trees

## ▶ All registered hosts receive these messages

- ends after Time-Out
- or when they unsubscribe

## ▶ Problems

- No TCP only UDP
- Many routers do not deliver multicast messages
  - solution: tunnels

# Routing Protocols

## ▶ Distance Vector Multicast Routing Protocol (DVMRP)


- used for years in MBONE
  - particularly in Freiburg
- own routing tables for multicast

## ▶ Protocol Independent Multicast (PIM)

- in Sparse Mode (PIM-SM)
- current (de facto) standard
- prunes multicast tree
- uses Unicast routing tables
- is more independent from the routers



## ▶ Prerequisites of PIM-SM:

- needs Rendezvous-Point (RP) in one hop distance
- RP must provide PIM-SM
- or tunneling to a proxy in the vicinity of the RP

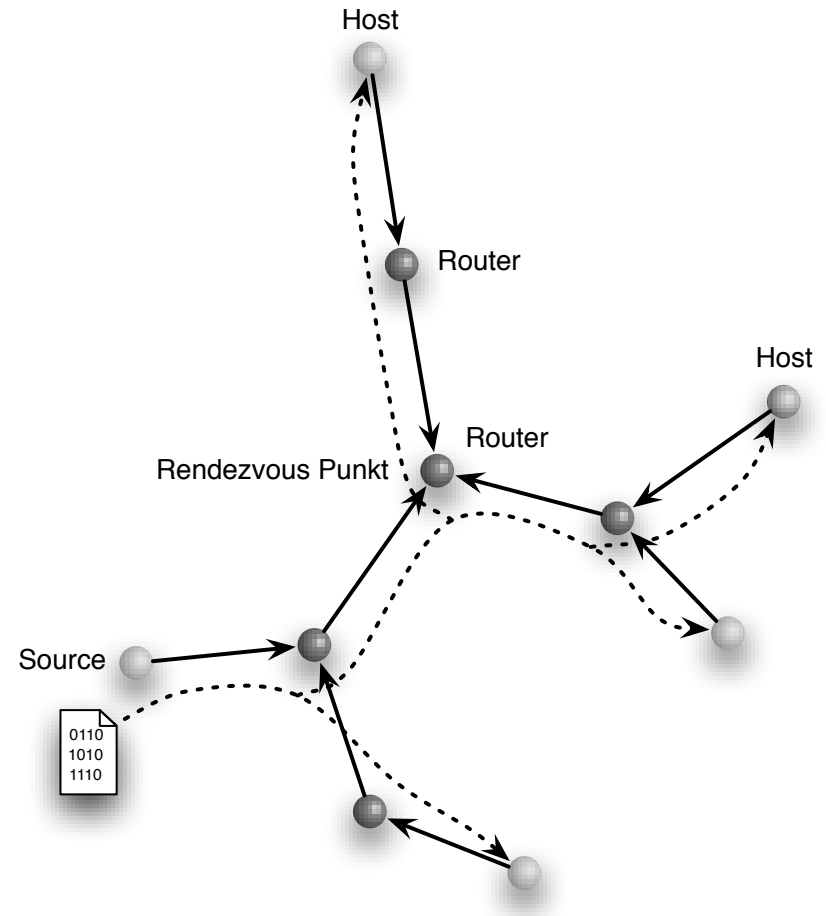

# PIM-SM Tree Construction


- ▶ Host A Shortest-Path-Tree
- ▶ Shared Distribution Tree

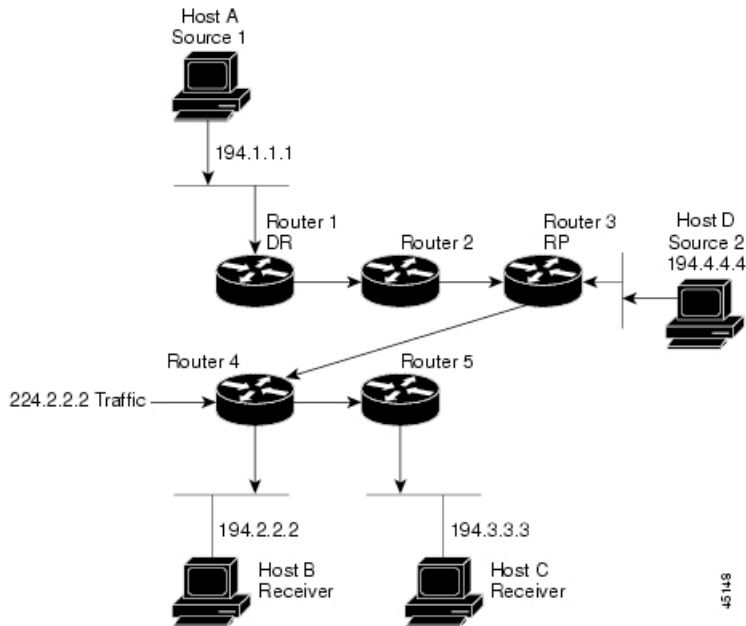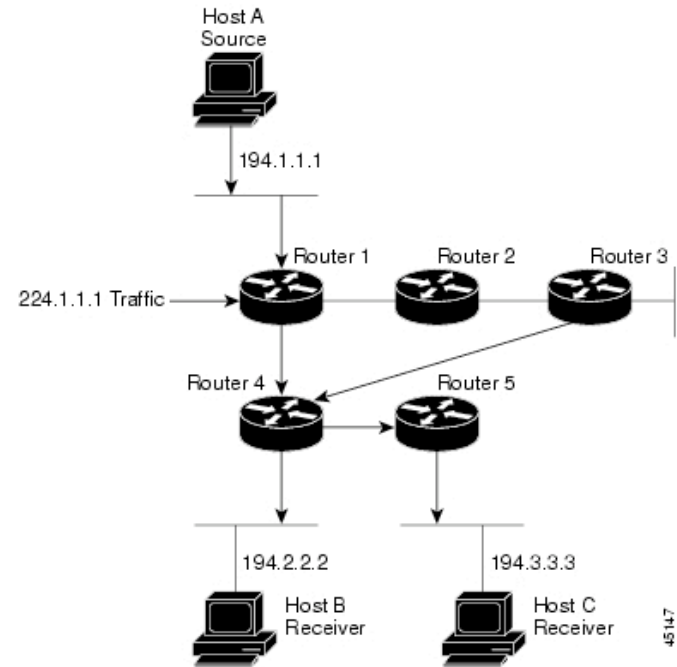

From Cisco: [http://www.cisco.com/en/US/products/hw/switches/ps646/products\\_configuration\\_guide\\_chapter09186a008014f350.html](http://www.cisco.com/en/US/products/hw/switches/ps646/products_configuration_guide_chapter09186a008014f350.html)

# IP Multicast Seldomly Available

- ▶ **IP Multicast is the fastest download method**
- ▶ **Yet, not many routers support IP multicast**
  - <http://www.multicasttech.com/status/>

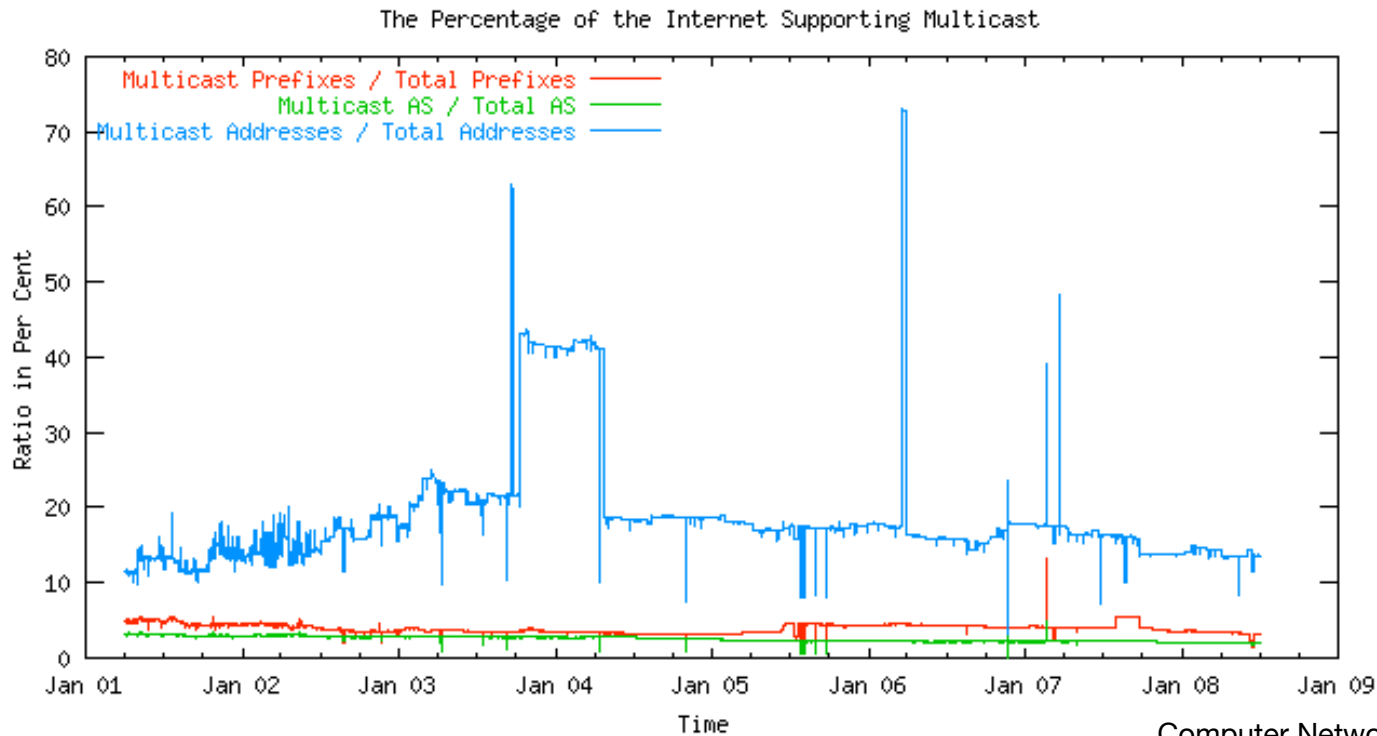


# Why so few Multicast Routers?

- ▶ **Despite successful use**
  - in video transmission of IETF-meetings
  - MBONE (Multicast Backbone)
- ▶ **Only few ISPs provide IP Multicast**
- ▶ **Additional maintenance**
  - difficult to configure
  - competing protocols
- ▶ **Enabling of Denial-of-Service-Attacks**
  - Implications larger than for Unicast
- ▶ **Transport protocol**
  - only UDP
    - Unreliable
  - Forward error correction necessary
    - or proprietary protocols at the routers (z.B. CISCO)
- ▶ **Market situation**
  - consumers seldomly ask for multicast
    - prefer P2P networks
  - because of a few number of files and small number of interested parties the multicast is not desirable (for the ISP)
    - small number of addresses



# Scribe & Friends

- ▶ **Multicast-Tree in the Overlay Network**
- ▶ **Scribe [2001] is based on Pastry**
  - Castro, Druschel, Kermarrec, Rowstron
- ▶ **Similar approaches**
  - CAN Multicast [2001] based on CAN
  - Bayeux [2001] based on Tapestry
- ▶ **Andere Ansätze**
  - Overcast [00] and Narada [00]
  - construct multi-cast trees using unicast connections
  - do not scale

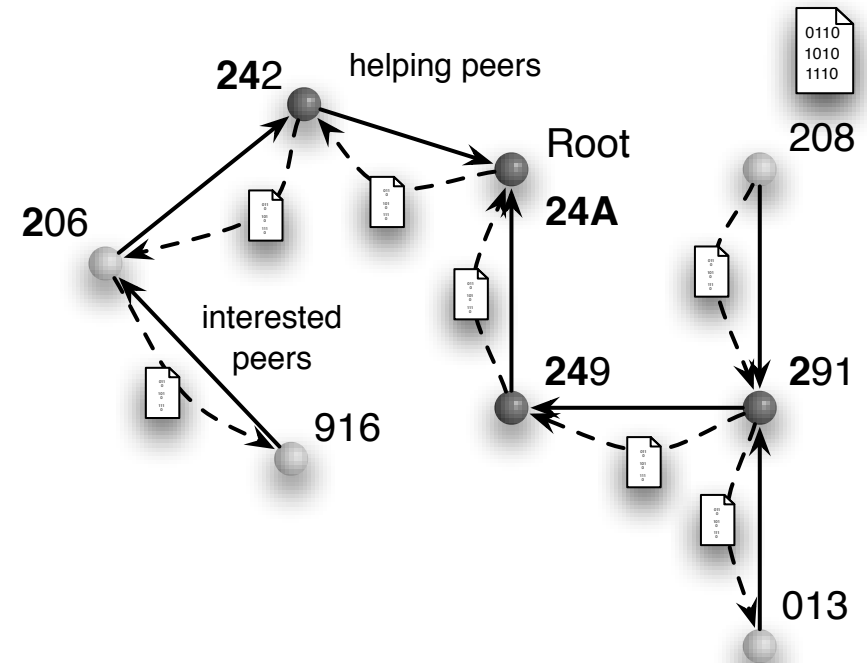

# How Scribe Works

## ▶ Create


- GroupID is assigned to a peer according to Pastry index

## ▶ Join

- Interested peer performs lookup to group ID
- When a peer is found in the Multicast tree then a new sub-path is inserted

## ▶ Download


- Messages are distributed using the multicast tree
- Nodes duplicate parts of the file

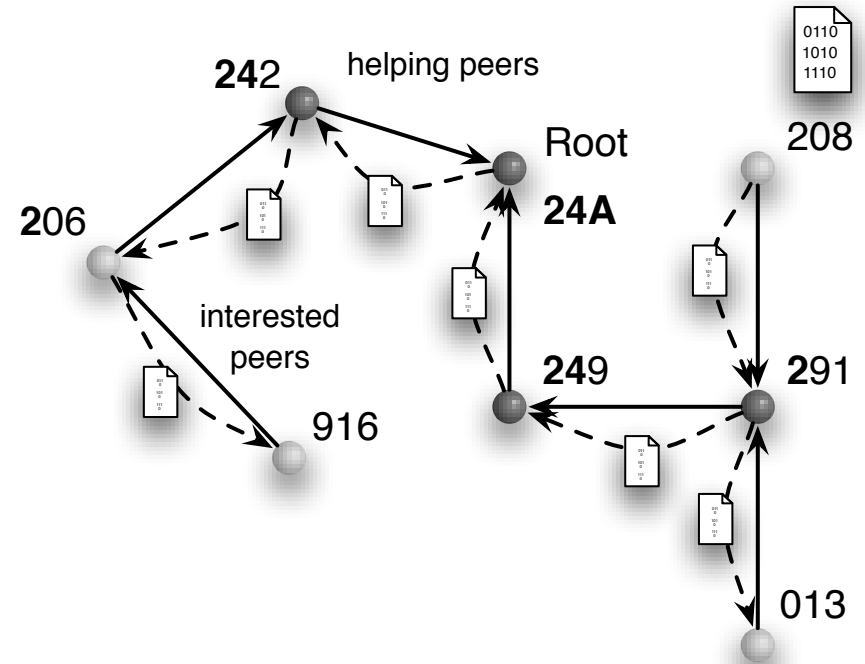

# Scribe Optimization


## ► Bottleneck-Remover

- If a node is overloaded then from the group of peers he sends messages
- Select the farthest peer
- This node measures the delay between it and the other nodes
- and rebalances itself under the next (then former) brother

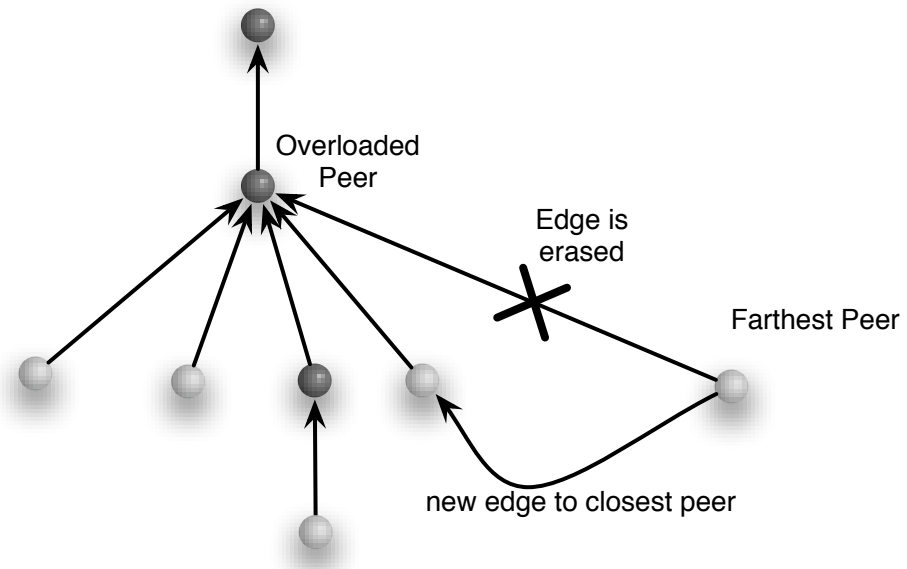


# Split-Stream Motivation

- ▶ **Multicast trees discriminate certain nodes**
- ▶ **Lemma**
  - In every binary tree the number of leaves = number of internal nodes + 1
- ▶ **Conclusion**
  - Nearly half of the nodes distribute data
  - While the other half does not distribute any data
  - An internal node has twice the upload as the average peer
- ▶ **Solution: Larger degree?**
- ▶ **Lemma**
  - In every node with degree  $d$  the number of internal nodes  $k$  und leaves  $b$  we observe
    - $(d-1)k = b - 1$
- ▶ **Implication**
  - Less peers have to suffer more upload

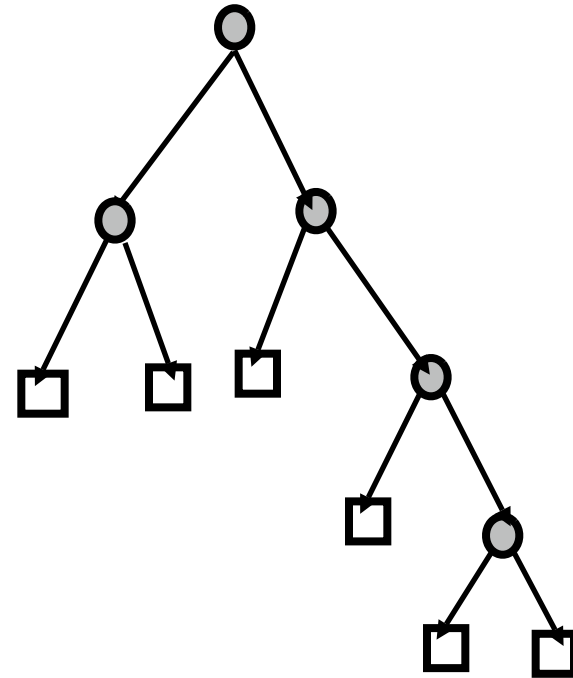

# Split-Stream

- ▶ **Castro, Druschel, Kermarrec, Nandi, Rowstron, Singh 2001**
- ▶ **Idea**
  - Partition a file of size into  $k$  small parts
  - For each part use another multicast tree
  - Every peer works as leaf and as distributing internal tree node
    - except the source
- ▶ **Ideally, the upload of each node is at most the download**

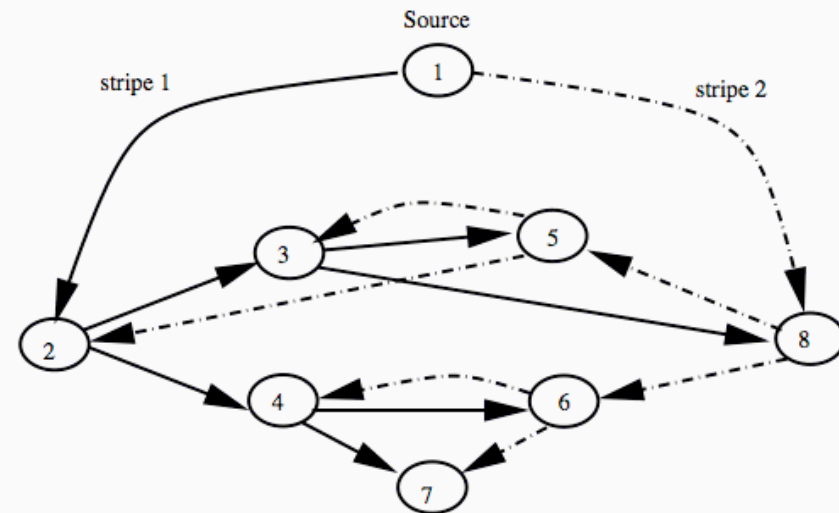

# Bittorrent

- ▶ **Bram Cohen**
- ▶ **Bittorrent is a real (very successful) peer-to-peer network**
  - concentrates on download
  - uses (implicitly) multicast trees for the distribution of the parts of a file
- ▶ **Protocol is peer oriented and not data oriented**
- ▶ **Goals**
  - efficient download of a file using the uploads of all participating peers
  - efficient usage of upload
    - usually upload is the bottleneck
    - e.g. asymmetric protocols like ISDN or DSL
- fairness among peers
  - seeders against leeches
- usage of several sources

# Bittorrent

## Coordination and File

### ▶ **Central coordination**

- by tracker host
- for each file the tracker outputs a set of random peers from the set of participating peers
  - in addition hash-code of the file contents and other control information
- tracker hosts do not store files
  - yet, providing a tracker file on a tracker host can have legal consequences

### ▶ **File**

- is partitioned in smaller pieces
  - as described in tracker file

- every participating peer can redistribute downloaded parts as soon as he received it
- Bittorrent aims at the Split-Stream idea

### ▶ **Interaction between the peers**

- two peers exchange their information about existing parts
- according to the policy of Bittorrent outstanding parts are transmitted to the other peer

# Bittorrent

## Part Selection

### ▶ Problem

- The Coupon-Collector-Problem is the reason for a uneven distribution of parts
  - if a completely random choice is used

### ▶ Measures

- Rarest First
  - Every peer tries to download the parts which are rarest
    - \* density is deduced from the communication with other peers (or tracker host)
  - in case the source is not available this increases the chances the peers can complete the download

- Random First (exception for new peers)
  - When peer starts it asks for a random part
  - Then the demand for seldom peers is reduced
    - \* especially when peers only shortly join
- Endgame Mode
  - if nearly all parts have been loaded the downloading peers asks more connected peers for the missing parts
  - then a slow peer can not stall the last download



# Bittorrent Policy


- ▶ **Goal**
  - self organizing system
  - good (uploading, seeding) peers are rewarded
  - bad (downloading, leeching) peers are penalized
- ▶ **Reward**
  - good download speed
  - un-choking
- ▶ **Penalty**
  - Choking of the bandwidth
- ▶ **Evaluation**
  - Every peers Peers evaluates his environment from his past experiences

# Bittorrent Choking

- ▶ **Every peer has a choke list**
  - requests of choked peers are not served for some time
  - peers can be unchoked after some time
- ▶ **Adding to the choke list**
  - Each peer has a fixed minimum amount of choked peers (e.g. 4)
  - Peers with the worst upload are added to the choke list
    - and replace better peers
- ▶ **Optimistic Unchoking**
  - Arbitrarily a candidate is removed from the list of choking candidates
    - the prevents maltreating a peer with a bad bandwidth

# Network Coding

- ▶ R. Ahlswede, N. Cai, S.-Y. R. Li, and R. W. Yeung, "Network Information Flow", (IEEE Transactions on Information Theory, IT-46, pp. 1204-1216, 2000)
- ▶ **Example**
  - Bits  $x$  and  $y$  need to be transmitted
  - Every line transmits one bit
  - If only bits are transmitted
    - then only  $x$  or  $y$  can be transmitted in the middle?
  - By using  $X$  we can have both results at the outputs


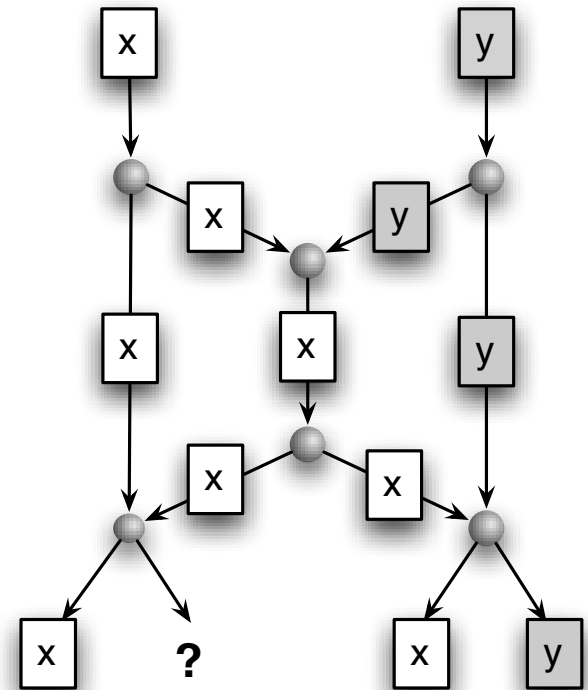


# Network Coding

- ▶ R. Ahlswede, N. Cai, S.-Y. R. Li, and R. W. Yeung, "Network Information Flow", (IEEE Transactions on Information Theory, IT-46, pp. 1204-1216, 2000)



- ▶ **Theorem [Ahlswede et al.]**

- There is a network code for each graph such that each node receives as much information as the maximum flow of the corresponding flow problem

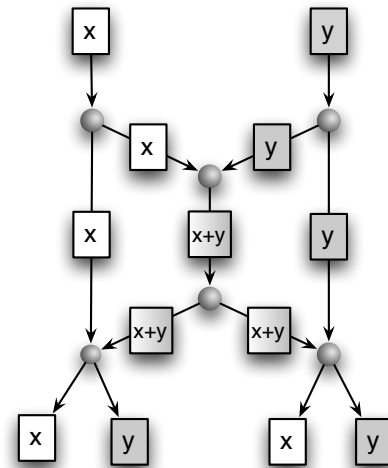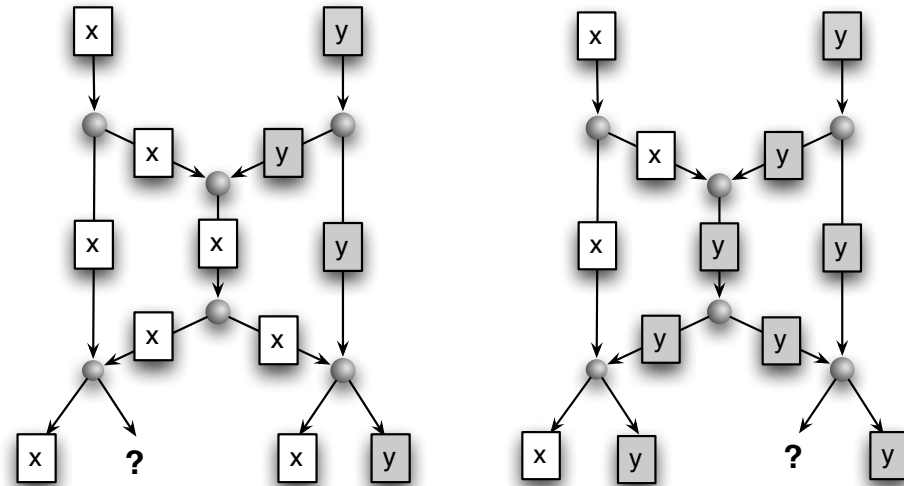

# Practical Network Coding Avalanche

- ▶ **Christos Gkantsidis, Pablo Rodriguez Rodriguez, 2005**
- ▶ **Goal**
  - Overcoming the Coupon-Collector-Problem
    - a file of  $m$  parts can be always reconstructed if at least  $m$  network codes have been received
  - Optimal transmission of files within the available bandwidth
- ▶ **Method**
  - Use codes as linear combinations of a file
    - Produced code contains the vector and the variables
  - During the distribution the linear combination are re-combined to new parts
  - The receiver collects the linear combinations
  - and reconstructs the original file using matrix operations

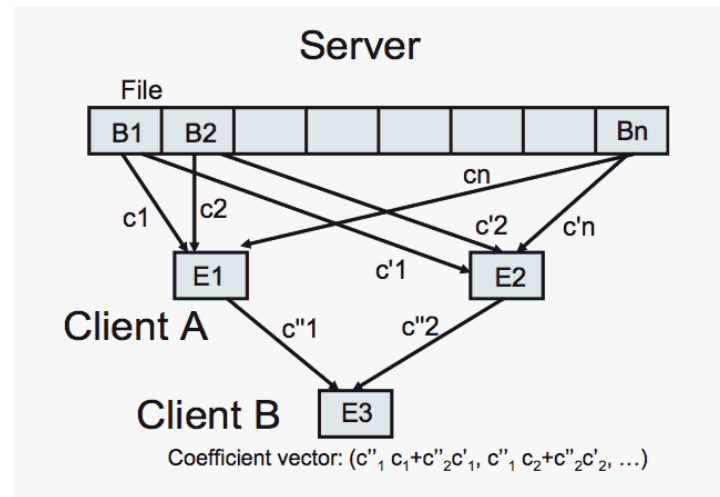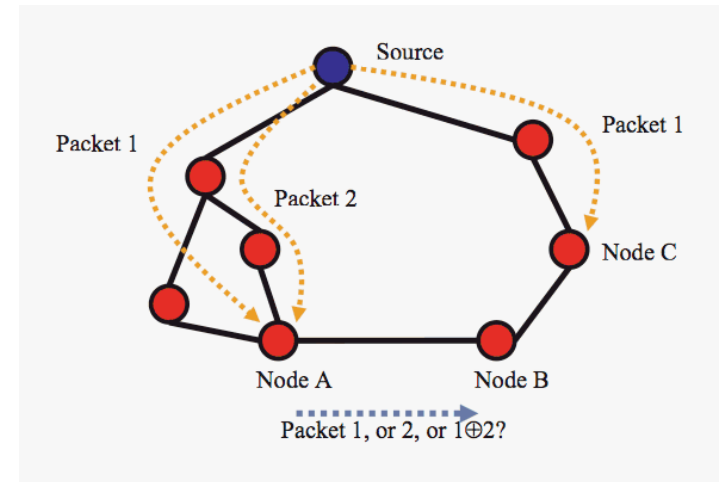

# Coding and Decoding

- ▶ **File:**  $x_1, x_2, \dots, x_m$
  - ▶ **Codes:**  $y_1, y_2, \dots, y_m$
  - ▶ **Random Variables**  $r_{ij}$
- $$(r_{i1} r_{i2} \dots r_{im}) \cdot \begin{pmatrix} x_1 \\ \vdots \\ x_m \end{pmatrix} = y_i$$

$$\begin{pmatrix} r_{11} & \dots & r_{1m} \\ \vdots & \ddots & \vdots \\ r_{m1} & \dots & r_{mm} \end{pmatrix} \cdot \begin{pmatrix} x_1 \\ \vdots \\ x_m \end{pmatrix} = \begin{pmatrix} y_1 \\ \vdots \\ y_m \end{pmatrix}$$


- ▶ **If the matrix is invertable then**

$$\begin{pmatrix} x_1 \\ \vdots \\ x_m \end{pmatrix} = \begin{pmatrix} r_{11} & \dots & r_{1m} \\ \vdots & \ddots & \vdots \\ r_{m1} & \dots & r_{mm} \end{pmatrix}^{-1} \cdot \begin{pmatrix} y_1 \\ \vdots \\ y_m \end{pmatrix}$$

# Speed of Network-Coding

## ► Comparison

- Network-Coding (NC) versus
- Local-Rarest (LR) and
- Local-Rarest+Forward-Error-Correction (LR+FEC)

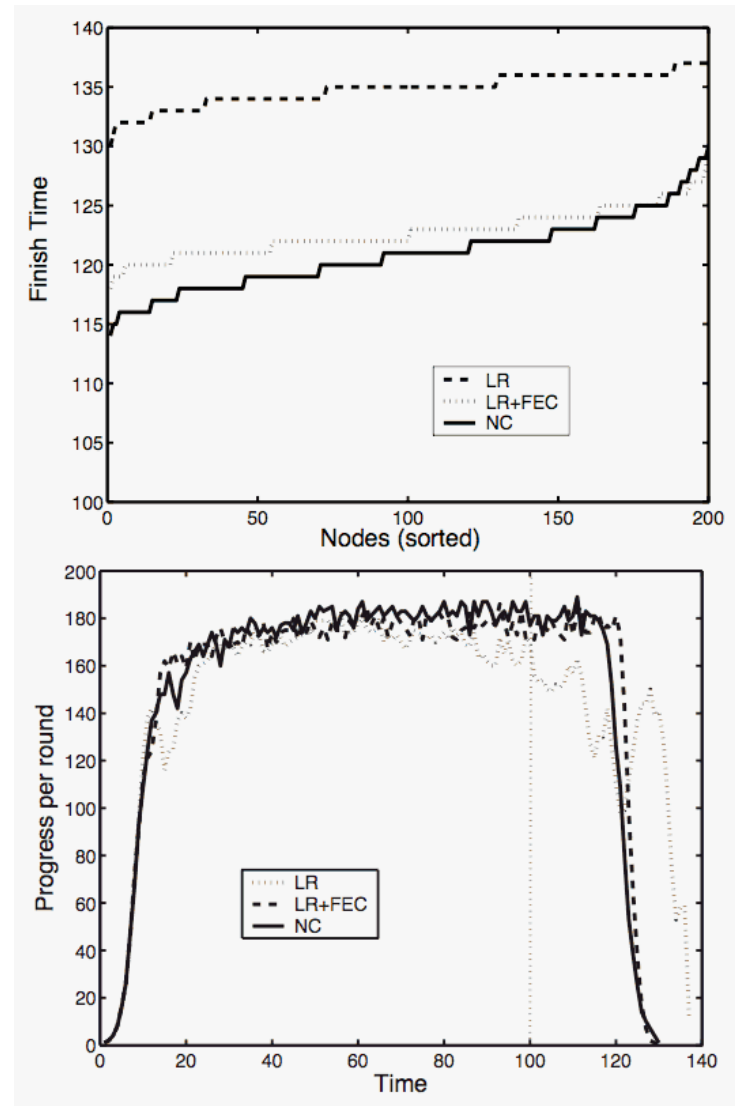

# Problems of Network-Coding

- ▶ **Overhead of storing of variables**
  - per block one variable vector
  - e.g. 4 GB file with 100 kB blocks
    - 4 GB/100 KB = 40 kB
    - Overhead of 40%
  - better: 4 GB und 1 MB-Block
    - 4kB Overhead = 0,4%
- ▶ **Overhead of Decoding**
  - Inversion of a  $m \times m$ - Matrix needs time  $O(m^3)$
- ▶ **Read/Write Accesses**
  - For writing  $m$  blocks each part must be read  $m$  times
  - Disk access is much slower than memory access





# Peer-to-Peer Networks

**End of 11th Week**

Albert-Ludwigs-Universität Freiburg  
Department of Computer Science  
Computer Networks and Telematics  
Christian Schindelhauer  
Summer 2008